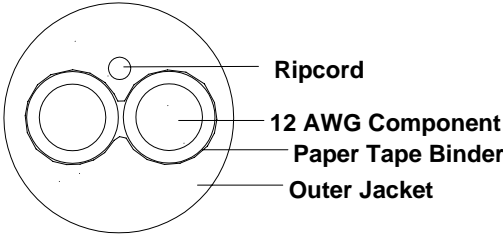
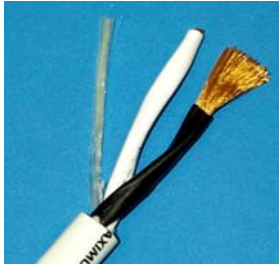


Product Specification Sheet

Catalog Number: 12-1P-UC

Construction Detail	Product Illustration
	
Physical Construction	Description
<p>Component 1: 12 AWG 3x87/36 bare copper conductor Polyethylene Insulation: .020-inch nominal thickness</p>	<p>THX™ certified ultra-low capacitance paired cable for in-wall distributed audio installations in accordance with NEC article 725.</p>
	Color Code
	<p>Black, White Special conductor print: +++++left+++++ on white conductor -----left----- on black conductor</p>
	Electrical Specifications
	<p>12 AWG: DCR: 1.75 Ω per thousand feet Capacitance: 20.4 pF per foot Voltage: 300 Volts RMS Temperature: -20°C to 75°C</p>
<p>Final assembly: 2 of component I twisted in a 2.5-inch Right hand lay Paper tape binder with 25% overlap Nylon Ripcord under the jacket. Pressure extruded PVC jacket: .050-inch nominal thickness Final construction: .389-inch nominal OD Product Print Legend: ULTRACAP™ by LIBERTY 12 AWG/1PAIR THX™ CERTIFIED SPEAKER CABLE MAXIMUM LENGTHS FRONT – 60 FEET SURROUNDS – 120 FEET E190607 (UL) CL3R 75C 12 AWG FT-4 Sequential footmarks are applied in conjunction with the print legend.</p>	Regulatory Specifications
	<p>(UL) rated CL3R C(UL) rated FT4</p>
Specification Control	Product Information
<p>Revision Date: 07/20/2005</p> <p>Liberty Wire & Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire & Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.</p>	<p>Jacket Colors: Black, White</p> <p>Packaging: 1000 foot spools</p>