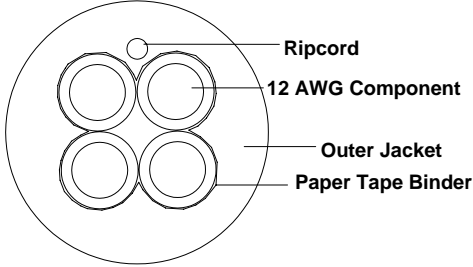



Product Specification Sheet

Catalog Number: 12-2P-UC

Construction Detail	Product Illustration
 <p style="text-align: center;"> Ripcord 12 AWG Component Outer Jacket Paper Tape Binder </p>	
Physical Construction	Description
<p>Component 1: 12 AWG 3x87/36 bare copper conductor Polyethylene Insulation: .020-inch nominal thickness</p>	<p>THX™ certified ultra-low capacitance paired cable for in-wall distributed audio installations in accordance with NEC article 725.</p>
	Color Code
	<p>Black, White, Red, Green Special conductor print: +++++left+++++ on white conductor ----left---- on black conductor +++++right+++++ on red conductor ----right---- on green conductor</p>
	Electrical Specifications
	<p>12 AWG: DCR: 1.75 Ω per 1000 feet Capacitance: 20.4 pF per foot Voltage: 300 Volts RMS Temperature: -20°C to 75°C</p>
	Regulatory Specifications
	<p>(UL) rated CL3R C(UL) rated FT4</p>
Specification Control	Product Information
<p>Revision Date: 07/20/2005</p> <p>Liberty Wire & Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire & Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.</p>	<p>Jacket Colors: White</p> <p>Packaging: 500 foot spools</p>