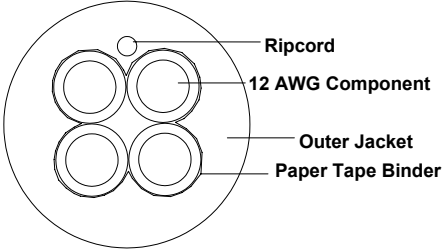



Catalog Number: 12-4C-EX+

| Construction Detail | Product Illustration |
|--|---|
|  <p>Ripcord 12 AWG Component Outer Jacket Paper Tape Binder</p> |  |
| Physical Construction | Description |
| <p>Component 1: 12 AWG 105/.2mm oxygen free copper conductor SR-PVC Insulation: .016-inch nominal thickness</p> | <p>Multi-conductor wire for in-wall distributed audio and control applications and installations in accordance with NEC article 725. Canada rated for Audio application only.</p> |
| | Color Code |
| <p>Final assembly: 4 of component 1 twisted in a 4-inch lay Paper tape binder with 25% overlap Nylon Ripcord under the jacket. Pressure extruded PVC jacket: .035-inch nominal thickness Final construction: .378-inch nominal OD Product Print Legend: ExtraFlex Plus™ By Liberty 12-4C-EX+ E190607-J (UL) 12 AWG OXYGEN FREE TYPE CL3 75°C --- C(UL) TYPE CMG FT4 60°C AUDIO ONLY Sequential footmarks are applied in conjunction with the print legend.</p> | <p>Red, Black, White, Green</p> |
| | Electrical Specifications |
| <p>Revision Date: 12/08/2003</p> <p>Liberty Wire & Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire & Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.</p> | <p>12 AWG: DCR: 1.83 Ω per 1000 feet Voltage: 300 Volts RMS Temperature: -20°C to 75°C</p> |
| | Regulatory Specifications |
| | <p>(UL) rated CL3 C(UL) rated CMG FT4 for Audio Only</p> |
| Specification Control | Product Information |
| | <p>Jacket Colors: White, Teal</p> <p>Packaging: 500 foot reels</p> |