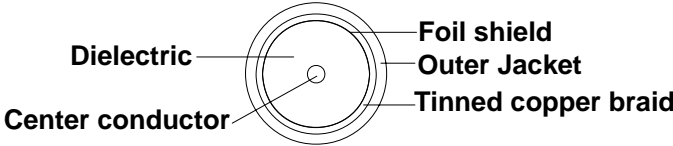



Product Specification Sheet

Catalog Number: 18-CMR-SD

Construction Detail	Product Illustration																																										
																																											
Physical Construction	Description																																										
<p>Component 1: Coax 18 AWG solid bare copper center conductor Foam polyethylene dielectric: .180-inch nominal diameter 100% Aluminum/Polyester tape foil bonded to the dielectric 95% 36 AWG tinned copper braid shield</p>	<p>Riser rated RG6/U precision video coaxial cable for Analog audio/video, Digital audio/video, HDTV/SDI, Broadcast, Broadband video, Baseband video, and Headend applications. A superior one cable solution for all 75 Ω RG6 non-plenum applications.</p>																																										
	Color Code																																										
	N/A																																										
	Electrical Specifications																																										
<p>Final assembly: Single coaxial cable FR-PVC jacket: .032-inch nominal thickness Final construction: .272-inch nominal OD Product Print Legend: LWC 18-CMR-SD HDTV SERIAL DIGITAL 18 AWG CMR (UL) C(UL) E190606-* {LOT} MADE IN USA Sequential footmarks are applied in conjunction with the print legend.</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #cccccc;"> <th style="text-align: left;">Coaxial:</th> <th colspan="2" style="text-align: center;">ATTENUATION</th> </tr> <tr> <td></td> <th style="text-align: center;">MHz</th> <th style="text-align: center;">dB/100 Ft.</th> </tr> </thead> <tbody> <tr> <td>DCR: 6.4 Ω per 1000 feet</td> <td style="text-align: center;">10.0</td> <td style="text-align: center;">.72</td> </tr> <tr> <td>DCR (shield): 2.9 Ω per 1000 feet</td> <td style="text-align: center;">71.5</td> <td style="text-align: center;">1.70</td> </tr> <tr> <td>Capacitance: 16.2 pF per foot</td> <td style="text-align: center;">135</td> <td style="text-align: center;">2.25</td> </tr> <tr> <td>Voltage: 300 Volts RMS</td> <td style="text-align: center;">270</td> <td style="text-align: center;">3.10</td> </tr> <tr> <td>Impedance: 75 Ω</td> <td style="text-align: center;">360</td> <td style="text-align: center;">3.65</td> </tr> <tr> <td>Temperature: -30°C to 75°C</td> <td style="text-align: center;">720</td> <td style="text-align: center;">5.30</td> </tr> <tr> <td>VOP: 82% Nom.</td> <td style="text-align: center;">1000</td> <td style="text-align: center;">6.20</td> </tr> <tr> <td>SRL: 23 dB (1-500 MHz)</td> <td style="text-align: center;">2000</td> <td style="text-align: center;">9.40</td> </tr> <tr> <td>15 dB (501-2400 MHz)</td> <td style="text-align: center;">3000</td> <td style="text-align: center;">11.60</td> </tr> <tr> <td></td> <td style="text-align: center;">3500</td> <td style="text-align: center;">12.57</td> </tr> <tr> <td></td> <td style="text-align: center;">4000</td> <td style="text-align: center;">13.48</td> </tr> <tr> <td></td> <td style="text-align: center;">4500</td> <td style="text-align: center;">14.34</td> </tr> </tbody> </table>	Coaxial:	ATTENUATION			MHz	dB/100 Ft.	DCR: 6.4 Ω per 1000 feet	10.0	.72	DCR (shield): 2.9 Ω per 1000 feet	71.5	1.70	Capacitance: 16.2 pF per foot	135	2.25	Voltage: 300 Volts RMS	270	3.10	Impedance: 75 Ω	360	3.65	Temperature: -30°C to 75°C	720	5.30	VOP: 82% Nom.	1000	6.20	SRL: 23 dB (1-500 MHz)	2000	9.40	15 dB (501-2400 MHz)	3000	11.60		3500	12.57		4000	13.48		4500	14.34
Coaxial:	ATTENUATION																																										
	MHz	dB/100 Ft.																																									
DCR: 6.4 Ω per 1000 feet	10.0	.72																																									
DCR (shield): 2.9 Ω per 1000 feet	71.5	1.70																																									
Capacitance: 16.2 pF per foot	135	2.25																																									
Voltage: 300 Volts RMS	270	3.10																																									
Impedance: 75 Ω	360	3.65																																									
Temperature: -30°C to 75°C	720	5.30																																									
VOP: 82% Nom.	1000	6.20																																									
SRL: 23 dB (1-500 MHz)	2000	9.40																																									
15 dB (501-2400 MHz)	3000	11.60																																									
	3500	12.57																																									
	4000	13.48																																									
	4500	14.34																																									
	Regulatory Specifications																																										
	<p>(UL) rated CMR C(UL) rated CMR</p>																																										
Specification Control	Product Information																																										
<p>Revision Date: 10/20/2005</p> <p>Liberty Wire & Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire & Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.</p>	<p>Jacket Colors: Red, Green, Blue, White, Yellow, Black, Brown, Violet, Orange</p> <p>Packaging: 1000 foot reels</p>																																										