
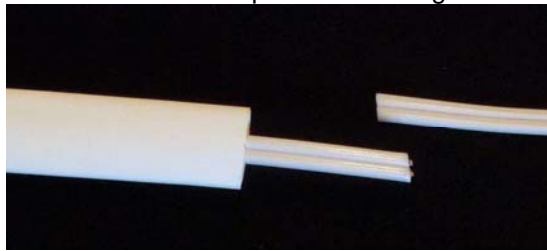


Termination of 24VD150W Power Supply Leads for use with Somfy ST30 Motors

<p><u>24VD150W Wire Polarity</u></p> <p>Positive (+) – Solid White Wire</p> <p>Negative (-) – White Wire w/Text</p>	<p><u>Sonesse ST30 Lead Polarity</u></p> <p>Positive (+) – White Wire with Black Dashes</p> <p>Negative (-) – Solid White Wire</p>  <p>Sonesse ST30 Motor Lead</p>
--------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Optional Splice Connection - Connecting the 24VD150W to a ST30 Motor


- 1) Determine which wires are positive and negative on both the power supply and ST30 lead.
- 2) Cut the Heat Shrink tube Supplied with the optional Butt Splice Kit into 3 Pieces. 1.5", 0.75" and 0.75"
- 3) Put the 1.5" Piece of Heat Shrink Tube over both positive and negative leads of one of the wires.



- 4) Separate the positive and negative wires app. 1" and strip the insulation off each wire to ½ the length of the butt splice. Note: Cut off solder tinned leads if they are present. The stripped portion to be crimped must be stranded copper.



- 5) Slide on ¾" Heat Shrink onto one of the positive leads.

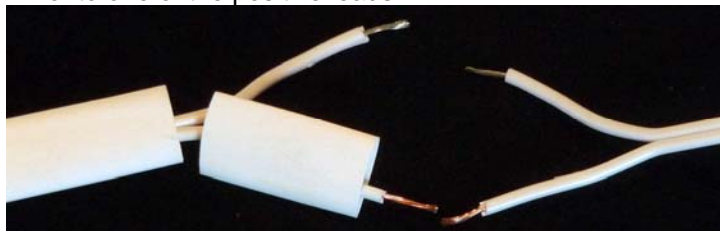


- 6) Slide the positive wires into opposing ends of the butt splice until each is visible in the center of the splice and crimp.



- 7) Pull on the wires to ensure a good crimp is achieved.
- 8) Repeat Steps 5, 6 & 7 for the negative lead.

- 9) Center the individual $\frac{3}{4}$ " heat shrink over the butt splice connections and shrink the tube using a heat shrink gun, hair dryer or lighter. Use caution to prevent burning the wire.

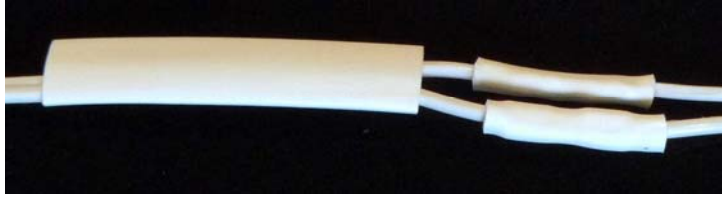

- 10) Center the 1.5" heat shrink over both butt splice connections and shrink the tube using a heat shrink gun, hair dryer or lighter. Use caution to prevent burning the wire.

